


Polyamide pipe line

• 60 bar-850 psi, $\varnothing 9,6$ mm-3/8" - h.p. pipe

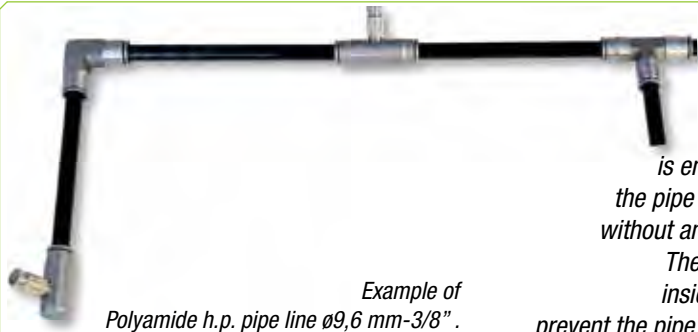

Example of Polyamide h.p. pipe line $\varnothing 9,6$ mm-3/8".

Hand pressure is enough to join the pipe to the fitting without any other tool. The metal vices inside the fitting prevent the pipe unthreading

IT.0011

gr. 45
oz. 1.6

H.p. polyamide pipe
 $\varnothing 9,6$ mm -3/8",
750 mm-29.6" section.



IT.0097

gr. 135
oz. 4.8

H.p. polyamide pipe
 $\varnothing 9,6$ mm-3/8",
3000 mm-118.2" section.



IT.0278

gr. 5250
oz. 185.2

H.p. polyamide pipe
 $\varnothing 9,6$ mm -3/8",
100 m-328 ft roll.
(max pressure 100 bar
-1450 psi)



IT.0279

gr. 1330
oz. 47.0

H.p. polyamide pipe
 $\varnothing 9,6$ mm -3/8",
25 m-82 ft roll.
(max pressure 100 bar
-1450 psi)



IT.0010

gr. 1475
oz. 52.1

H.p. polyamide pipe
 $\varnothing 9,6$ mm -3/8",
25 m-82 ft roll.



IT.0008

gr. 5900
oz. 208.3

H.p. polyamide pipe
 $\varnothing 9,6$ mm -3/8",
100 m-328 ft roll.



LG.30007100

gr. 25
oz. 0.9

Tube cutter
for polyamide pipe
 $\varnothing 2-12$ mm / 0.08" - 0.47".



CLA.PAS008

gr. 7
oz. 0.3

Rubberized stainless steel clamp,
to fix polyamide pipe
 $\varnothing 9,6 \times 5$ mm-3/8".



WU.0001

gr. 600
oz. 21.2

Stainless steel screws set,
with wall plugs
 $\varnothing 5$ mm-0.20"
to fix clamp.



quantity
2 x 200

ZX.0524

gr. 190
oz. 6.8

Ball valve kit,
G 1/4" F-F with brass start
fittings $\varnothing 9,6$ mm-3/8" to
intercept h.p. pipe line



ZX.0519

gr. 160
oz. 5.7

**H.p. end line kit with
automatic drain valve,**
complete with drain
valve and 1500 mm-59"
transparent hose.



ZX.0905

gr. 820
oz.

L.p. water feeding kit,
complete with 3 m-9.8 ft,
l.p. hose and 2 female l.p.
ball quick couplings for
hose $\varnothing 12-15$ / 0.47" - 0.59".



Polyamide pipe line

• 60 bar-850 psi, $\varnothing 9,6$ mm-3/8" - fittings



IT.0339

gr. 20
oz. 0.7

Start quick fitting,
made of nicked brass,
G 1/4" M- $\varnothing 9,6$ mm-3/8".



IT.0340

gr. 40
oz. 1.5

Straight nozzle holder quick fitting,
made of nicked brass,
 $\varnothing 9,6$ mm-3/8".



1 hole
threaded 10/UNC/2A

IT.0341

gr. 40
oz. 1.5

Straight nozzle holder quick fitting,
made of nicked brass,
 $\varnothing 9,6$ mm-3/8".



2 holes - 120°
threaded 10/UNC/2A

IT.0342

gr. 30
oz. 1.1

End line nozzle holder quick fitting,
made of nicked brass,
 $\varnothing 9,6$ mm-3/8".



1 hole
threaded 10/UNC/2A

IT.0343

gr. 30
oz. 1.1

Straight pipe connection quick fitting,
made of nicked brass,
 $\varnothing 9,6$ mm-3/8".



IT.0344

gr. 60
oz. 2.2

Elbow pipe connection quick fitting,
made of nicked brass,
 $\varnothing 9,6$ mm-3/8".



IT.0345

gr. 60
oz. 2.2

Tee pipe connection quick fitting,
made of nicked brass,
 $\varnothing 9,6$ mm-3/8".



IT.0346

gr. 70
oz. 2.5

Cross pipe connection quick fitting,
made of nicked brass,
 $\varnothing 9,6$ mm
3/8".



IT.0347

gr. 30
oz. 1.1

End line cap,
made of nicked brass.



IDROBASE®

PASSION FOR WATER 



idrobaser®

www.idrobaser.com



perfectcool®

www.perfectcool.it



idrotech®

www.idrotech.com



club dei riparatori®

www.sparesclub.com

35010 BORGORICCO (PD) ITALY -

Via dell'Industria, 25

Phone +39 049 9335903 - Fax +39 049 9335922

idrobaser@idrobaser.com

www.idrobasergroup.com

